




Aluminum LED Profile

BP-15x13.7 – Bendable plaster Series


Minimum bending radius >300 mm

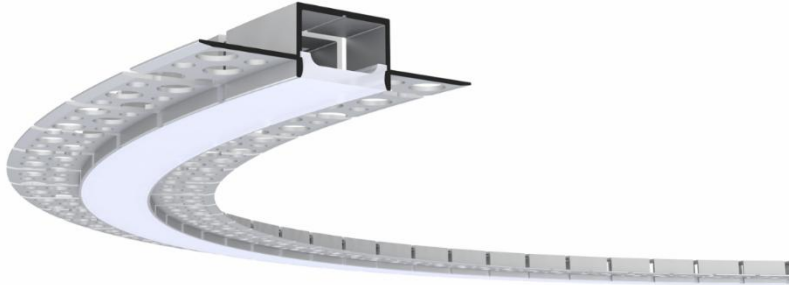


PMMA Opal



PC Milky



PC Frosted



PC Clear



Black




Silver



White


TECHNICAL DRAWING

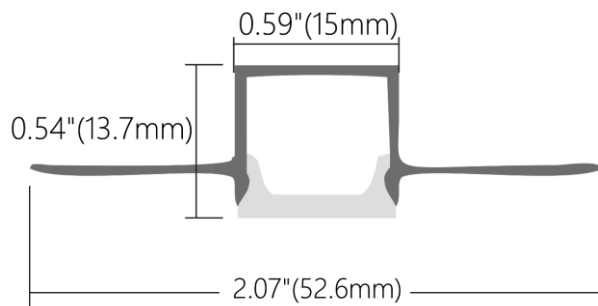

TECHNICAL SUMMARY

Series	Bendable plaster series
Dimensions (W×H)	15 × 13.7 mm (code reference)
Standard length(s)	2000 mm
Diffuser/cover options	Silicone cover/diffuser
Accessories in series	Cover/Diffuser
Material	Aluminum profile; cover as per ordering codes

INSTALLATION METHOD

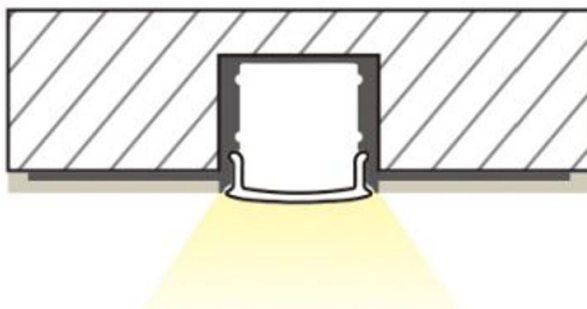

Aluminum LED Profile

BP-15x13.7 – Bendable plaster Series

APPLICATION(S)

- This bendable plaster-in LED profile is used to create seamless, trimless, curved linear lighting effects integrated directly into drywall or plasterboard ceilings and walls for modern architectural and decorative applications

ORDERING CODES

Item	Evolum code	Description
Profile	BP-15x13.7-SA	aluminum profile 2000mm
Cover/Diffuser	-	Silicone cover 2000mm